



One Piece Shower Module Neo-Corner Cast Acrylic

FEATURES

- **A 4242.02G**

The unit is molded with a shampoo/soap shelf centered on the back wall. All units have an anti-skid floor treatment.

Unit must be set in a mortar base, leveled and any clearances between the pit opening and the unit be filled with mortar. Shimming is necessary. It is recommended that a floor drain at or near the entrance to the shower be included.

The factory supplied components are to include two stainless steel vertical grab bars, and a stainless steel curtain rod.

The unit is thermoformed from a continuous cast acrylic sheet into a one piece, seamless unit. The unit is reinforced with a composite matrix. The unit has a backside fire rating of "A" and a flame spread of 25.

- **A 4242.02F R/L**

Same as above with fold-up seat with white phenolic bench.

NOTES

- Anti-skid floor treatment meets performance requirements of ASTM F-462-78.
- The basic shower conforms to ANSI Z124.2.
- Nominal Dimensions: Inside: 42" x 34" (1067 x 864)
Outside: 43½" x 35" (1105 x 889)
Pit Roughing-In: 44" x 35½" (1118 x 902)
- Factory installed components are provided with additional back reinforcements to provide code complying structural integrity. In addition, these components are sealed from the backside.


OPTIONS

- Dome Light. (1001/1021)
- Shower curtain. (C5)
- 2" (51) plastic drain with chrome plated strainer. (PD2)
- 2" (51) cast brass drain with chrome plated strainer. (H30)
- Lucite® acrylic sheet containing Microban® antimicrobial product protection. Available in white and bone only. (MBP)


Lucite is a registered trademark of INEOS Acrylics, Inc. Microban is a registered trademark of Microban Products Company, Huntersville, NC.

One Piece Cast Acrylic neo-Corner Shower Module

A 4242.02G

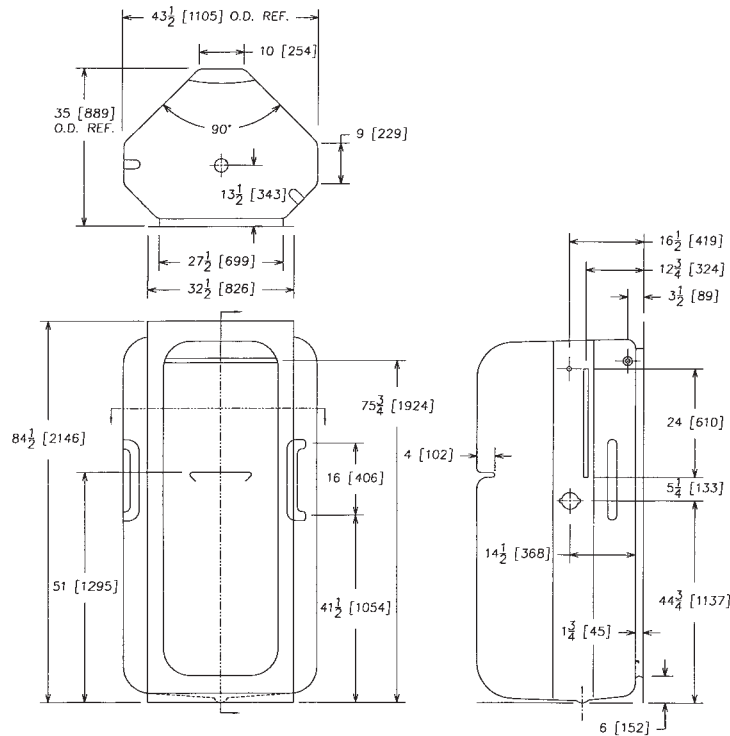

A 4242.02FL

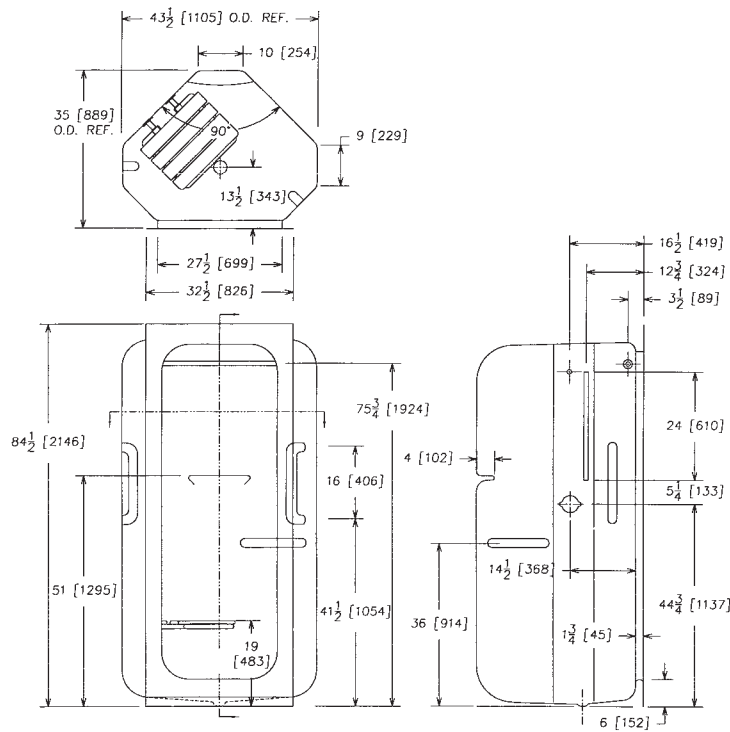

IMPORTANT: Roughing-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice. No responsibility is assumed for use of superseded or voided leaflets.