

General:

Precast terrazzo one piece products are made of black and white marble chips cast in grey portland cement to produce a compressive strength of not less than 3000 P.S.I., seven days after casting. The terrazzo surface is ground and polished with all air holes and/or pits grouted and the excess removed. Mop service basins are available in custom sizes.


SB series 6" (152) high. Shoulders shall not be less than 2" (51) wide with 1/2" (13) pitch toward inside. All SB series models come with plain curbs.

The drain body in mop basins are made of stainless steel cast integrally and provide for a caulked lead connection not less than 1" (25) deep to a 3" (76) pipe.

Installation:

Establish 1/4" (6) clearance between mop service basin and building wall. It is required that the entire area between the mop service basin and the building floor has a 1/2" (13) layer of mortar in order that the mop service basin is level.

Optional stainless steel tiling flanges available.

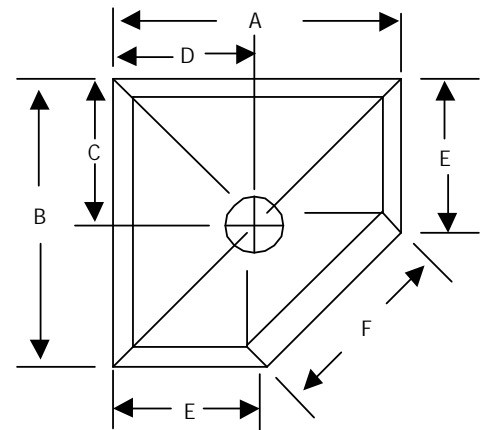

NOTE: Drawings not to scale

6" PLAIN CURBS								
MODEL	SIZE	APPROX. SHIP WT.	A	B	C	D	E	F
SB-2424	24 x 24 x 6	165 lbs/75 kg	24(610)	24(610)	12(305)	12(305)		
SB-3030	30 x 30 x 6	280 lbs/125 kg	30(762)	30(762)	15(381)	15(381)		
SB-3232	32 x 32 x 6	260 lbs/118 kg	32(813)	32(813)	16(406)	16(406)		
SB-3636	36 x 36 x 6	325 lbs/148 kg	36(914)	36(914)	18(457)	18(457)		
SB-3624	36 x 24 x 6	220 lbs/100 kg	36(914)	24(610)	18(457)	12(305)		
NEO-CORNER								
SBC-3636	36 x 36 x 6	295 lbs/134 kg	36(914)	36(914)	12(305)	12(305)	18(457)	25 3/8 (645)